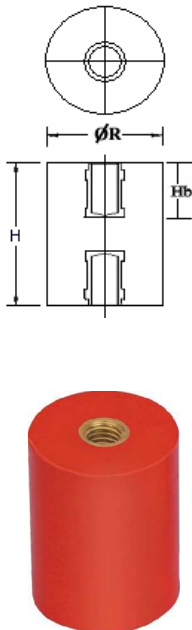


# IZOLATOR WSPORCZY WALCOWY TYPU CY


Kod	Wysokość mm	Gwint	Wymiary			Napięcie Pracy (AC/DC)	Rysunek
			A/F mm	R mm	Hb mm		
<b>CY2225(M4)</b>	25	M4	-	22	10	400/500	
<b>CY2225(M6)</b>	25	M6	-	22	10	400/500	
<b>CY3030(M6)</b>	30	M6	-	30	10	600/750	
<b>CY3030(M8)</b>	30	M8	-	30	15	600/750	
<b>CY3030(M10)</b>	30	M10	-	30	15	600/750	
<b>CY3040(M6)</b>	40	M6	-	30	20	1000/1200	
<b>CY3040(M8)</b>	40	M8	-	30	20	1000/1200	
<b>CY3040(M10)</b>	40	M10	-	30	20	1000/1200	
<b>CY3050(M6)</b>	50	M6	-	30	20	1200/1500	
<b>CY3050(M8)</b>	50	M8	-	30	25	1200/1500	
<b>CY3050(M10)</b>	50	M10	-	30	25	1200/1500	
<b>CY5050(M10)</b>	50	M10	-	50	20	1200/1500	
<b>CY2660(M6)</b>	60	M6	-	26	20	1500/1800	
<b>CY2660(M8)</b>	60	M8	-	26	25	1500/1800	
<b>CY2660(M10)</b>	60	M10	-	26	25	1500/1800	
<b>CY3060(M6)</b>	60	M6	-	30	20	1500/1800	
<b>CY3060(M8)</b>	60	M8	-	30	20	1500/1800	
<b>CY3060(M10)</b>	60	M10	-	30	20	1500/1800	
<b>CY2663(M6)</b>	63	M6	-	26	20	1500/1800	
<b>CY2663(M8)</b>	63	M8	-	26	20	1500/1800	
<b>CY2663(M10)</b>	63	M10	-	26	20	1500/1800	

Tworzywo: **DMC**

Gwint: **Stal ocynkowana**

Dopuszczalna temperatura pracy: **165° C**

Sposób montażu:

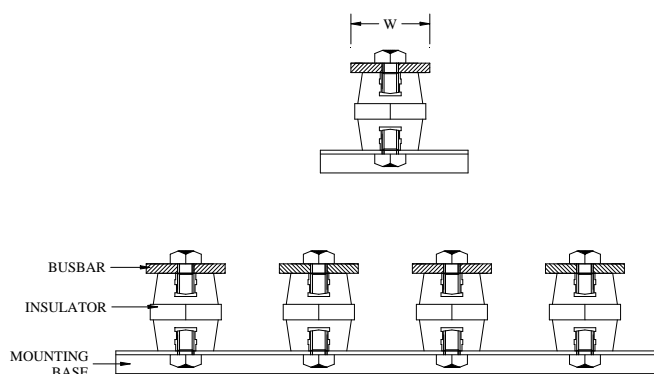

## Moment dokręcenia

CY 2663 , CY 3030 & 3060 (M 8 ) 150 - 275 kg cm